

THE BEST ALWAYS RISE TO THE TOP

SUNSTREAM
FLOATLIFT™

Visualize using your boat like your car with the unmatched speed, security, versatility and ease of use of the Sunstream FloatLift™. Powerful hydraulics pull the foam-filled polyethylene floats under the boat in as little as 30 seconds with the simple press of a remote control. In the raised position, the virtually unsinkable floats are automatically secured with patented GravityLock™. The floats also make it easy to access your hull and prop for cleaning and maintenance.



COMPLETE CONTROL

One-button on the included remote control to raise/lower your boat.



SWIFTSHIELD™ (ACCESSORY)

Semi-Automatic Remote controlled boat cover system

Simply tie the FloatLift™ to most places you can tie your boat: slips, side-ties or even a mooring buoy. The DC system can be charged using either the solar or AC powered options. The standard rear guides and remote control make docking incredibly easy.


The FloatLift™ is designed for fresh or salt water, with an aluminum frame, stainless steel hardware, marine grade hydraulic cylinders with stainless shafts, and marine grade hoses. The rubber-capped SuperBunks™ are not only durable, but provide the ultimate in cushioned support for your hull.

- Level launch/lift in seconds
- Durable, foam-filled polyethylene pontoons
- Free-floating, portable design ties with dock lines
- Versatile docking locations: slips, side-tie, mooring buoys
- Stylish, low profile design allows accessibility to hull and prop
- Capacities up to 36K lbs, min water depth 12" under hull
- Remote-controlled operation
- Solar or AC power options

PREMIUM FREE-FLOATING HYDRAULIC BOAT LIFT



SUNSTREAMCORP.COM

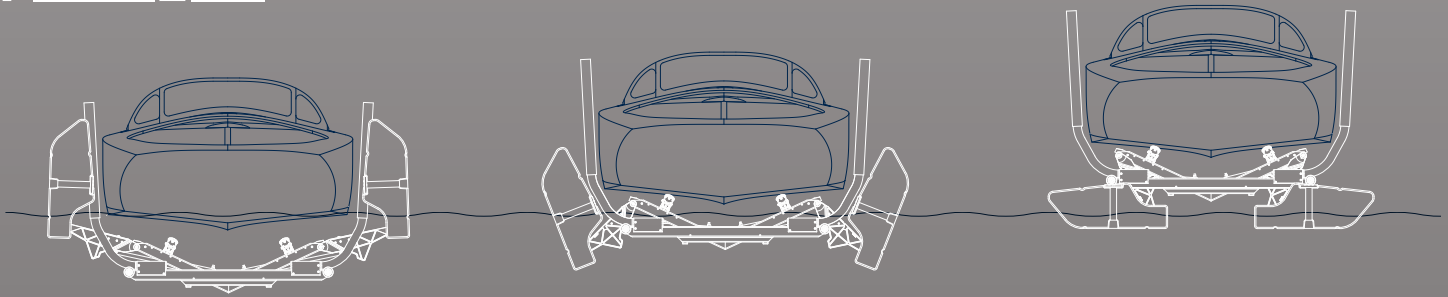

SPECIFICATIONS

| FloatLift Models | FL6012 | FL10014 | FL13018 | FL13018W | FL15023 | FL15023W | FL24020 | FL36026 | FL40026 |
|--|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Capacity (kg) | 2,722 | 4,763 | 5,897 | 5,897 | 6,810 | 6,810 | 10,896 | 16,344 | 18,144 |
| Lift Length (m) | 6.1 | 7.32 | 8.84 | 8.84 | 10.37 | 10.37 | 11.59 | 13.42 | 13.42 |
| Lift Width UP Position (m) | 3.23 | 3.38 | 3.38 | 4.08 | 3.64 | 4.08 | 4.88 | 4.88 | 4.88 |
| Weight (kg) | 590 | 1,134 | 1,315 | 1,406 | 1,737 | 1,771 | 3,632 | 4,086 | 4,086 |
| Launching Speed (approx.) | 18 sec | 18 sec | 40 sec | 40 sec | 35 sec | 35 sec | 60 sec | 90 sec | 90 sec |
| Water Depth Required (cm) | draft + 30 | draft + 30 | draft + 30 | draft + 30 | draft + 30 | draft + 40 | draft + 50 | draft + 50 | draft + 50 |
| Minimum Slip Width (m) | 3.66 | 4.27* | 4.27* | 4.88** | 4.27* | 4.88** | 6.71 | 6.71 | 6.71 |
| Maximum Boat Beam (m) | 2.62 | 3.23 | 3.23 | 3.66 | 3.20 | 3.66 | 4.19 | 4.27 | 4.27 |
| Allowable Draft for typical V-Hull (cm)*** | 50-55 | 86 | 86 | 86 | 86 | 86 | 121 | 121 | 121 |

* Wider slip required for beams over 2.90m **Wider slip required for beams over 3.51m
***For Cat Hull allowable draft subtract 3.66m for many boats

PATENTS: 6830410, D487423, D484086, D484450, 6823809, 7527014, 6032601

ACCESSORIES

- SwiftShield™ - Semi-Automatic Boat Cover System **NEW**
- HoverCover™ for protection from sun, rain and debris
- Motorstop for positioning fore and aft
- HandsFree™ Controller (patented and patents pending) **NEW**
- PowerPack shelves for mounting PowerPack to guide-on or dock
- Universal LED Underwater Lights
- Tournament Boat Bunk Bracket
- Pontoon Kits with and without Ballast System

| HoverCover™ Models | FA-H24108 | FA-H30144* |
|--|------------------|--------------------|
| Length (m) | 7.32 | 9.14 |
| Width Between Uprights (m) | 2.69 | Min 2.89 Max 3.20 |
| Cover Material -- navy | Sunbrella Canvas | Sunbrella Canvas |
| Lift Model | FL6012 | FL10014*, FL13018* |
| Max Boat Height without HC Extensions ** | 2.20 | 2.61 |

* Not for use with mooring buoy application
**Boat height = hull draft + bridge clearance



Remote control standard with all FloatLift™ models.

